



OFFEL

Sistemi di ricezione TV e SAT

User Manual

Profino Revolution Plus HP

Art. 26-711A



SW Version 1.6.0

CONTENTS

1. INTRODUCTION	3
1.1. Product description	3
1.2. Typical installation	3
1.3. Package contents	3
1.4. Hardware installation	4
1.5. Mounting the Profino Revolution Plus	4
1.6. Configuring the Profino Revolution Plus	5
2. TECHNICAL SPECIFICATIONS	11
3. BLOCK DIAGRAM	12
4. SAFETY INSTRUCTIONS	13
5. CONDITIONS OF WARRANTY	14

No part of this manual may be copied, reproduced, transmitted, transcribed or translated into any language without permission.

Unitron reserves the right to change the specifications of the hardware and software described in these manuals at any time.

Unitron cannot be held liable for any damages resulting from the use of this product. Specifications are subject to change without notice. 02/20

© Unitron - Frankrijklaan 27 - B-8970 Poperinge - Belgium

T +32 57 33 33 63 **F** +32 57 33 45 24

sales@unitrongroup.com

www.unitrongroup.com

1. INTRODUCTION

1.1. Product description

The Johansson Profino Revolution Plus is an easy to use programmable filter amplifier and convertor for terrestrial signals. The module optimizes terrestrial VHF/UHF and FM signals from multiple inputs with the goal to provide high quality images on your TV screen. The state-of-the-art programmable filter amplifier has no equivalent on the market due to its revolutionary technology:

- Can process and convert more than 50 channels (consisting out of 15 filters, each up to 6 MUXes wide)
- Sharpest filters on the market (50 dB on adjacent channels)
- Real-time AGC on all individual multiplexes
- Complete flexibility in assigning filters from any input. Each channel can be frequency shifted to any other channel in the VHF or UHF band (Flex Matrix)
- To avoid unauthorized persons changing the settings, all Profiler products can be locked with a security code
- Made in Europe, for worldwide application
- 4 inputs: FM / DAB/VHF / 2x UHF / 15 filters / AGC / 12-24 V remote power
- Product dimensions (H X W X D): 165mm x 217mm x 59mm

1.2. Typical installation

The Profino Revolution Plus can be used to provide high quality television images and FM signals in a wide range of projects, both in the hospitality as in the residential market. Typical buildings or infrastructures where the Profino Revolution Plus can be used include, but are not limited to:

- Large and small hotels, hostels, bed and breakfasts, holiday parks
- Hospitals, rest homes, prisons, settlements
- Large and small multi-dwelling units

1.3. Package contents

- 1 Profino Revolution Plus (ref. 6711)
- 1 Power Adapter Cord (180cm)

1.4. Hardware installation

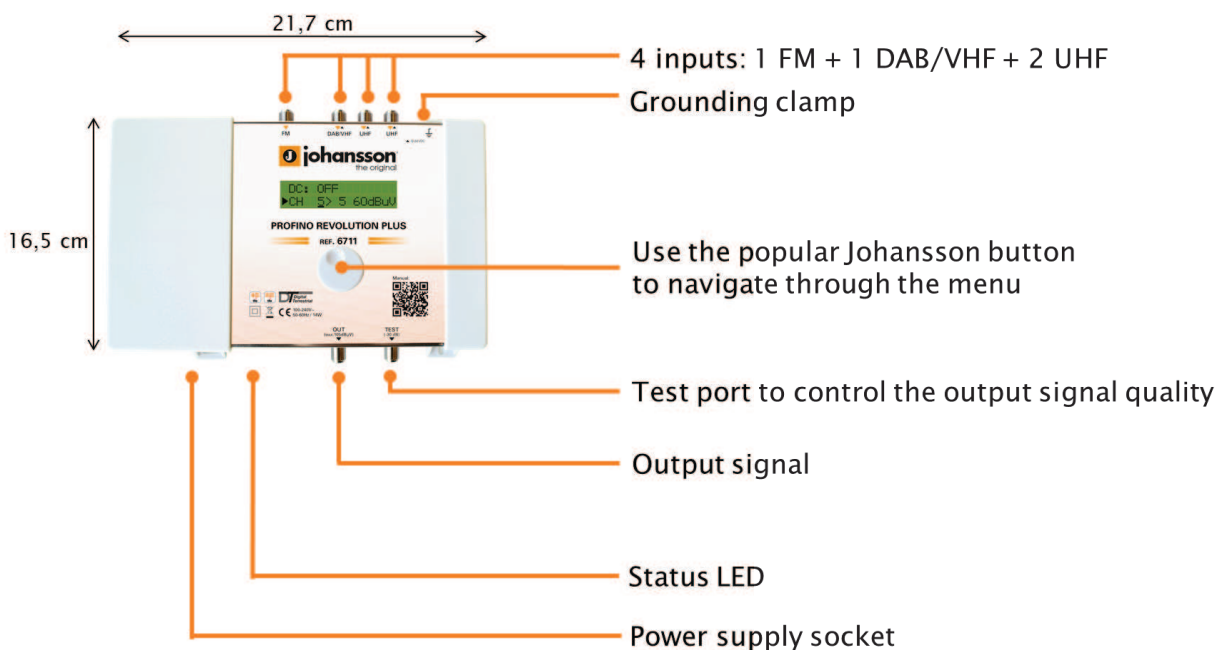


FIGURE 1: TOP VIEW OF PRODUCT


1.5. Mounting the Profino Revolution Plus

- **Important:** Mount the module vertically to a wall in a well-ventilated room and leave a minimum space of 15 cm around the product to guarantee a maximum ventilation of the product

- Connect an earth wire to the grounding clamp
- Connect the power adapter cord to the power supply socket. Check the status LED for the indication of DC power presence
- Connect the inputs to the Profino Revolution Plus
- Connect a coaxial cable to the output connector for distribution of the signal

- Connect a network analyser to the test port to control the signal quality
- Configure the Profino Revolution Plus using the rotary button, see below

- The power adapter can easily be replaced without disconnecting the product. To do so, open the top left plastic cover by pushing the click at the opposite side of the mains connector

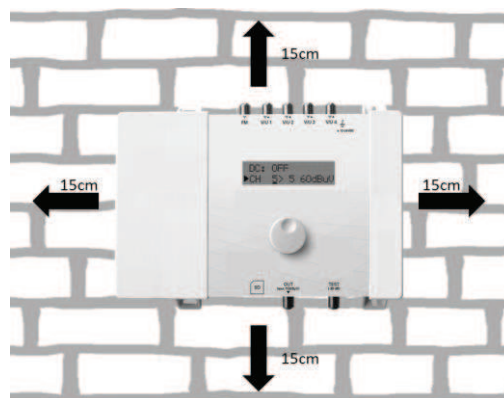

1.6. Configuring the Profino Revolution Plus

NAVIGATING THROUGH THE MENU

Use the Johansson rotary/push button to navigate through the menu. This is very straightforward and simple. The table below shows how the rotary/push should be used:

	Push the button 2s to enter the basic configuration. Push the button to confirm your selections.
	When rotating the button, you scroll through the different screens.

MENU OVERVIEW

◀▶	INPUT FM	INPUT DAB/VHF	INPUT UHF 1-2	OUTPUT	ADVANCED	EXIT	▶◀
◄	GAIN	DC	DC	LEVEL	LANGUAGE	LOCK	►
		ADD CHANNEL	ADD CHANNEL	VHF/DAB ATTENUATOR	REGION	NO LOCK	
					DC VOLTAGE		
					BANDWIDTH		
					FW VERSION		
					SERIAL NUMBER		

REGION/COUNTRY SETTINGS

IMPORTANT! Before starting the configuration, it is advised to set the correct region or country. Unpower the unit, push the button and keep pushing the button while you repower the unit. Release the button when the display shows "RESET FINISHED". Now the product is reset and will ask you to enter country or region. This will amongst others determine the channel plan for VHF and UHF and the DC voltage for the inputs (12 or 24V).

DISPLAY READOUT	EXPLANATION
	To activate the correct channel frequency plan, select the country or region where the Profino Revolution Plus is situated. Rotate to select and confirm by tapping the rotary button. The default setting is Europe. The Profino Revolution Plus is also operational in the following countries/regions: Australia, Brazil, China, Hongkong, Italia, New-Zealand, Russia, South Africa, UK and USA.

All the following menu items can be accessed without the reset procedure.

Push the rotary button for 2 seconds to access the menu

INPUT SETTINGS

DISPLAY READOUT	EXPLANATION
	Tap the rotary button to enter the INPUT FM menu. Rotate the button to navigate through the submenu.
	To filter and amplify an FM signal, tap GAIN, select the gain of the input FM signal (15 to 35 dB) and tap to confirm. Remark: DAB should be added via VHF input.
	After INPUT FM is configured, scroll up to the top of the menu (INPUT FM), tap the rotary button and scroll right to INPUT VHF. Tap INPUT VHF to enter the menu to configure input 1. Rotate the rotary button to scroll down in the submenu of INPUT VHF.
	DC: Decide whether the input should provide power to an external amplifier. Choose between OFF or 12 V. <u>Remark:</u> If the external amplifier needs 24 V, you can change this in advanced settings (see further).

DISPLAY READOUT	EXPLANATION
	Tap Add Channel to add channel. Up to 6 channels can be added at once.
	First select the starting channel (e.g. CH5) and tap to confirm. Then select the stop channel (e.g. CH7, this means that you will add 3 channels). Tap to confirm. Then you can convert them using the rotary button (e.g. CH5 to CH7 converts to CH8 to CH10) and tap to confirm.
	Some other examples: To add CH5 and convert to CH6, select as follows: 5: 5 → 6: 6 To add CH21-22-23 and convert to CH31-32-33, select as follows: 21:23 → 31:33 <u>Remark 1:</u> The value 85dBμV (in the bottom right corner) indicates the incoming level of the channel. <u>Remark 2:</u> For EU, Italy and New-Zealand region, Channel 13 (230-240MHz) and "VHF" can be used. "VHF" means the whole band is treated in 1 bandpass filter from 174 to 240MHz. Channels "VHF" and CH13 cannot be converted.

DISPLAY READOUT	EXPLANATION
	To add another (group of) channel(s), scroll down to ADD CHANNEL and tap to confirm. To prevent bad quality or scrambled images, make sure that only one input channel is assigned to one output channel. If 2 channels are assigned to the same output channel, a star (*) will appear.
	The same applies for adding multiple channels. Make sure that each output channel is selected only once.

After this, the correct LTE filter will be set for the UHF inputs (possible filters are 694MHz, 790MHz or OFF). If the channels are lower than 48, the 694MHz filter is activated. The 790MHz filter is activated for the channels lower than 60.

To delete a (group of) channel(s), position the arrow on the channel and press the rotary button 3 seconds.

DISPLAY READOUT	EXPLANATION
	To delete a (group of) channel(s), position the arrow on the channel and press the rotary button 3 seconds.
	When you have added all the channels to INPUT VHF, and you want to add channels to the other inputs, scroll up to the top of the menu (to INPUT VHF), tap the button and scroll to the next input. Repeat the previous steps for all input channels.

OUTPUT SETTINGS

DISPLAY READOUT	EXPLANATION
	Define the OUTPUT LEVEL of the output signal. Range between 88 dB μ V and 108 dB μ V. Check the output via a network analyser on the -30dB test port. Note: The more channels you select, the less input power you should give.
	To compensate for cable losses, a VHF/DAB Attenuator of up to 15 dB can be set to lower the VHF and DAB output level (compared to the UHF output level). 0 dB means all channels have the same output level (see previous display readout), 15 dB means that VHF and DAB are 15 dB lower than the chosen output level above.

Note: In the OUTPUT menu, you define the output level in dB μ V of the MUXes. The Profino Revolution Plus has enough gain to guarantee this output level under all input conditions. In case a slope has been set, the output level indicated on the display will be the output level of the highest frequency MUX.

ADVANCED SETTINGS

DISPLAY READOUT	EXPLANATION
	The language of the Profiler Revolution can be set to English, Italian, Spanish or French.
	Tap REGION to check to which region/country the Profiler Revolution is set. To change the region/country, a hard reset is required (see instructions above (cfr. REGION/COUNTRY SETTINGS)).
	Define DC VOLTAGE for the inputs, choose between 12V or 24V. This is a global setting for all inputs, each input can then be switched between OFF or this value. (cfr. STEP 2). All countries are set by default on 24V, except UK which is set by default on 12V. The filter bandwidth can be changed from -2000 kHz to 0 kHz in steps of 250 kHz. This allows you to optimize the bandwidth of your filter. For instance, a European 8 MHz channel can be changed from 6 to 8 MHz. The default setting is -1000 kHz, which is an optimal setting in 95% of the cases.
	Tap FW VERSION to check the firmware version of the device. Tap SERIAL NUMBER to check the serial number of the device. To format the SD CARD, tap FORMAT CARD.


EXIT SETTINGS

DISPLAY READOUT	EXPLANATION
	To avoid unauthorized people changing the settings, all Profiler products can be locked with a security code.
	Select LOCK and SET LOCK CODE. When the lock code is set, the device will shut down.
	When you restart the device, you will now have to enter the correct lock code. <u>Remark:</u> If you forgot the lock code, you can always use the value 50. This master code is fixed and cannot be changed.
	If you do not want to work with a lock code, go to EXIT and tap NO LOCK.

2. TECHNICAL SPECIFICATIONS

Code	26-711A	
Item	REVOLUTION PLUS HP	
No. of inputs	4	
Type of inputs	FM - DAB/V - U - U	
Working range	MHz	FM: 88 ÷ 108 VHF: 174 ÷ 240 UHF: 470 ÷ 862
Input level	dBμV	FM: 37 ÷ 77 VHF: 45 ¹ ÷ 109 UHF: 45 ¹ ÷ 109
Max output level	dBμV	FM: 113 (60dB/IM3) V/U: 114 (60dB/IM3) V/U: 125 (35dB/IM3) V/U: 108 (1 MUX) V/U: 107 (6 MUX)
No. channel selectable	> 50	
Add channels	Single channel or a channel group (2 ÷ 6 adjacent ch.)	
Conversions	Yes (in the same band)	
Gain	dB	FM: 15 ÷ 35 VHF: > 60 UHF: > 60
Gain adjustment	FM: 20 dB VHF/UHF: AGC	
Output level adjustment	dBμV	VHF/UHF: 88 ÷ 108 (default: 98)
Selectivity Δ 1 MHz	dB	50
Channel bandwidth options	optimized (default), Best MER or more selective filter	
Electrostatic discharge protection	10	
Remote power supply	Vdc	All inputs
Power Supply	mA	12 or 24
AC main tension	100 (for 4 inputs)	
Power consumption	W	240 V~ ±10% 50Hz
Isolation class	12	
Classe di isolamento	II	
Dimensions (LxWxH)	mm	Yes
Packaging dimensions (LxWxH)	mm	270x225x70
Packaging weight	Kg	1,183
Product weight	Kg	0,78
Fit temperature	°C	-5 ÷ +50
Compliant to	EN 55083-2, EN 60065	

3. BLOCK DIAGRAM

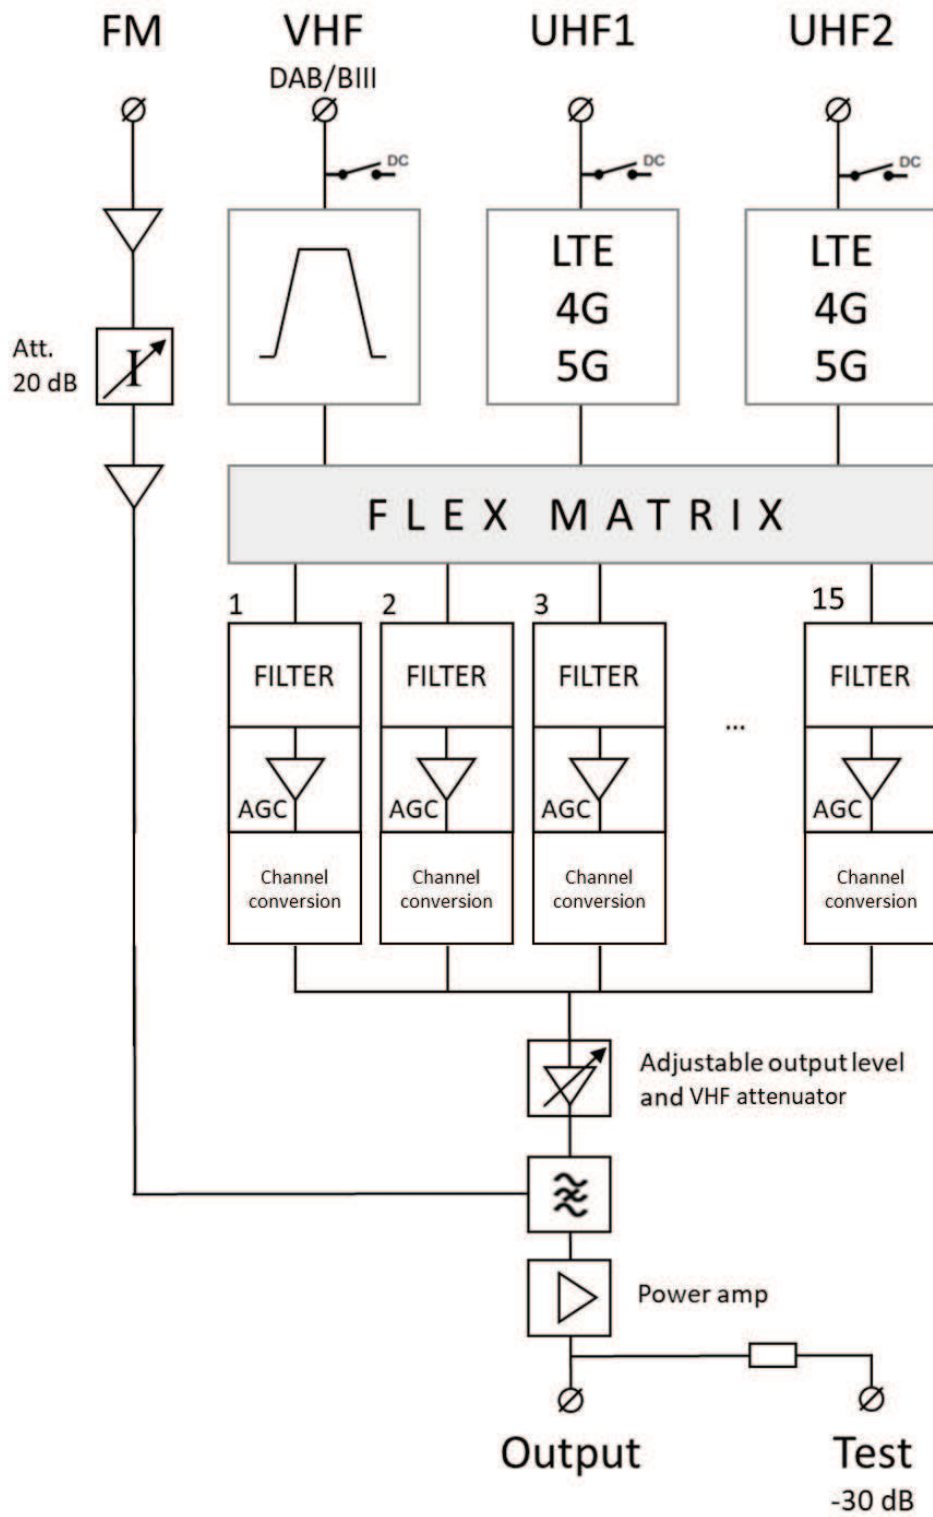

4. SAFETY INSTRUCTIONS



Read these instructions carefully before connecting the unit



To prevent fire, short circuit or shock hazard:

- Do not expose the unit to rain or moisture.
- Install the unit in a dry location without infiltration or condensation of water.
- Do not expose it to dripping or splashing.
- Do not place objects filled with liquids, such as vases, on the apparatus.
- If any liquid should accidentally fall into the cabinet, disconnect the power plug.



To avoid any risk of overheating:

- Install the unit in a well aired location and keep a minimum distance of 15 cm around the apparatus for sufficient ventilation
- Do not place any items such as newspapers, tablecloths, curtains, on the unit that might cover the ventilation holes.
- Do not place any naked flame sources, such as lighted candles, on the apparatus
- Do not install the product in a dusty place
- Use the apparatus only in moderate climates (not in tropical climates)
- Respect the minimum and maximum temperature specifications



To avoid any risk of electrical shocks:

- Connect apparatus only to socket with protective earth connection.
- The mains plug shall remain readily operable
- Pull out power plug to make the different connections of cables
- To avoid electrical shock, do not open the housing of adapter.



Maintenance



Only use a dry soft cloth to clean the cabinet.



Do not use solvent



For repairing and servicing refer to qualified personnel.



Dispose according your local authority's recycling processes

5. CONDITIONS OF WARRANTY

Unitron N.V. warrants the product as being free from defects in material and workmanship for a period of 24 months starting from the date of production indicated on it. See note below.

If during this period of warranty the product proves defective, under normal use, due to defective materials or workmanship, Unitron N.V., at its sole option, will repair or replace the product. Return the product to your local dealer for reparation.

THE WARRANTY IS APPLIED ONLY FOR DEFECTS IN MATERIAL AND WORKMANSHIP AND DOES NOT COVER DAMAGE RESULTING FROM:

- Misuse or use of the product out of its specifications,
- Installation or use in a manner inconsistent with the technical or safety standards in force in the country where the product is used,
- Use of non-suitable accessories (power supply, adapters...),
- Installation in a defect system,
- External cause beyond the control of Unitron N.V. such as drop, accidents, lightning, water, fire, improper ventilation...

THE WARRANTY IS NOT APPLIED IF

- Production date or serial number on the product is illegible, altered, deleted or removed.
- The product has been opened or repaired by a non-authorized person.

NOTE

Date of production can be found in the product's serial number code. The format will either be "YEAR W WEEK" (e.g., 2017W32 = year 2017 week 32) or "YYWW" (e.g., 1732 = year 2017 week 32).



UNITRON NV
Frankrijklaan 27
B-8970 Poperinge
Belgium

T +32 57 33 33 63
F +32 57 33 45 24

sales@unitrongroup.com

www.unitrongroup.com