



Curved brackets super heavy

art. 07-576/A ZANCA CURVA RINFORZATA

Ideal for the mast installation of satellite dishes.


The tubes are made of steel, hot dip galvanized to ensure high quality and durability. The protection of the zinc cladding is of 50/85 microns thick.

The measures are in mm, unless otherwise specified.

Dimensional and thickness tolerances are allowed by the regulations that establish the quality of the raw materials used.



Code	07-576/A	
Item	ZANCA CURVA RINFORZATA	
BENT		
Type of bent	fixed	
Bending radius	180°	
Thickness	mm	2
Ø	mm	42
Dimensions	mm	500 (A); 285 (B); 300 (C)
U-BOLTS		
No.	2	
Width	mm	120 (D)
Height	mm	36 (E)
Thickness	6	
Screws	QST 8x60 mm	
Dimensions screws holes	mm	100
Distance between U-bolts	mm	245 (F)
For masts Ø	mm	30 ÷ 60

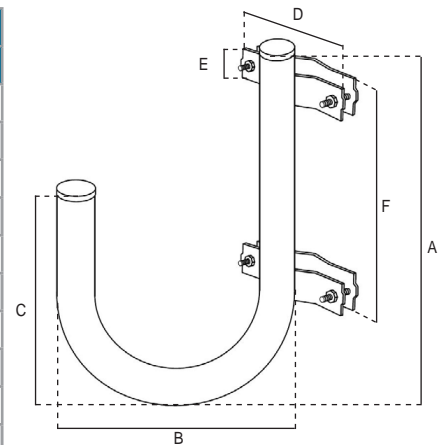

Single packaging

Packaging	Dimensions LxWxH (mm)	Weight (Kg)
Bracket	510x300x120	2,1

