



## U-bolts

### art. 07-607 CAVALLOTTO PER PALO 500 mm

Ideal for for coupling two masts.


The tubes are made of steel, hot dip galvanized to ensure high quality and durability. The protection of the zinc cladding is of 50/85 microns thick.

The measures are in mm, unless otherwise specified.

Dimensional and thickness tolerances are allowed by the regulations that establish the quality of the raw materials used.



Code	07-607	
Item	CAVALLOTTO PER PALO 500 mm	
MAST		
Length	mm	500 (A)
Thickness	mm	2
Ø	mm	50
GEAR BRACKETS		
Side	mm	100 (B)
Height	mm	20 (C)
Thickness	mm	2,5
Distance between brackets	mm	400
Threaded U bolts		M8
For masts Ø	mm	30 ÷ 70

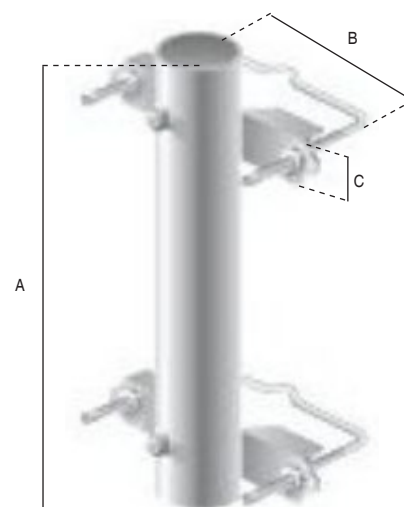

#### Single packaging

Packaging	Dimensions LxWxH (mm)	Weight (Kg)
U-bolt	100x100x500	1,1

