



U-bolts

art. 07-610/A CAVALLOTTO A 8 PER PALI 40/90

Ideal for coupling two masts.


The tubes are made of steel, hot dip galvanized to ensure high quality and durability. The protection of the zinc cladding is of 50/85 microns thick.

The measures are in mm, unless otherwise specified.

Dimensional and thickness tolerances are allowed by the regulations that establish the quality of the raw materials used.



Articolo	07-610/A	
Sigla	CAVALLOTTO A 8 PER PALI 40/90	
Total length	mm	220 (A)
SPACER		
Type of spacer	"U" shape	
Length	mm	100 (B)
Dimensions	mm	40 (C); 20 (D)
Thickness	mm	5
U-BOLTS		
Length	mm	170 (E)
Width	mm	40 (F)
Thickness	mm	8
Screws	M10x90 mm	
Distance between screws holes	mm	140 (G)
For masts Ø	mm	40 ÷ 90

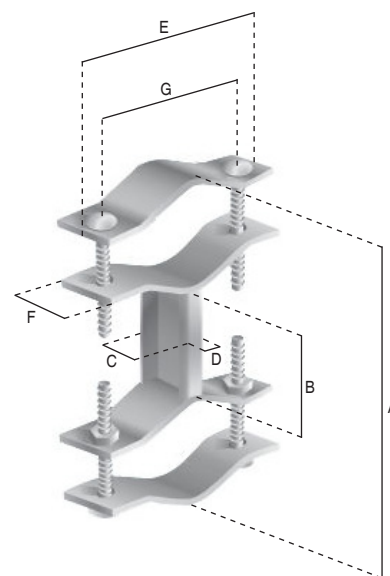

Single packaging

Packaging	Dimensions LxWxH (mm)	Weight (Kg)
U-bolt	225x170x43	2,4

