



Bent masts

L 2 m

art. 07-803

**PALO CURVO mt. 2 Ø 50 mm SP. 2 mm
DISTANZIATO 60 mm**

It is used for pass through roof installation and the cable passage.

The tubes are made of steel, hot dip galvanized to ensure high quality and durability. The protection of the zinc cladding is of 50/85 microns thick.

The measures are in mm, unless otherwise specified.


Dimensional and thickness tolerances are allowed by the regulations that establish the quality of the raw materials used.



Code	07-803	
Item	PALO CURVO mt. 2 Ø 50 mm SP. 2 mm DISTANZIATO 60 mm	
POLE		
Ø	mm	50
Thickness	mm	2
Length	m	2 (A)
FIXING PLATES		
Distances	mm	250 (B); 900 (C)
Dimensions	mm	90x90
Thickness	mm	2,5
For masts Ø	mm	25 ÷ 55
Screws	QST 8x60 mm	
SPACER		
Length	mm	60 (D)
Height	mm	40
Thickness	mm	8
BENT		
Type of bent	removable	
Bending radius	180°	
Ø	mm	50 (with connection of Ø 55)
Thickness	mm	1,4
Dimensions	mm	60 (E); 330 (F); 240 (G)

Single packaging (mast and bent are packaged separately)

Packaging	Dimensions LxWxH (mm)	Weight (Kg)
Mast	150x50x2000	6,3
Bent	235x350x130	1,0

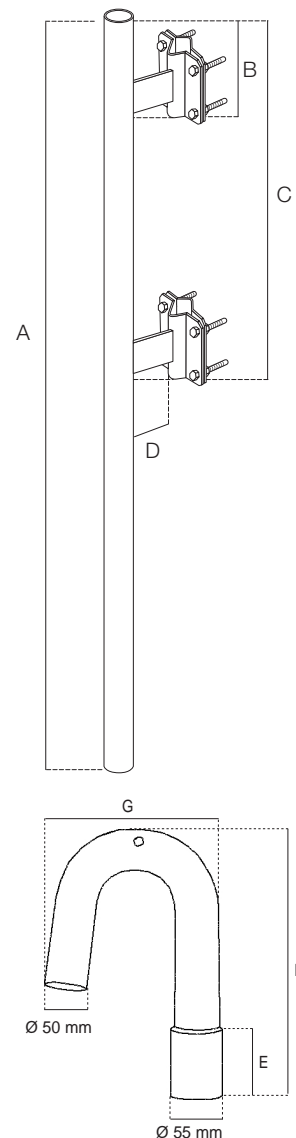

Rev. 0 12.2016

