

Kit con centralini TV autoprogrammabili
serie **SMART AMP**



User Manual

Smart Amp

Ref. 7473L1 – 7473L2 – 7474L1 – 7474L2



PATENTED TECHNOLOGY

SW Version 1.0



Kit con centralini TV autoprogrammabili serie **SMART AMP**

SMART AMP (REF. 7473L1 – 7473L2 – 7474L1 – 7474L2)

CONTENTS

1. INTRODUCTION	3
1.1. Product description	3
1.2. Package contents	3
1.3. Hardware installation	4
1.4. Installing the Smart Amp.....	4
2. TECHNICAL SPECIFICATIONS	5
3. SAFETY INSTRUCTIONS	6
4. CONDITIONS OF WARRANTY	7

No part of this manual may be copied, reproduced, transmitted, transcribed or translated into any language without permission.

Unitron reserves the right to change the specifications of the hardware and software described in these manuals at any time.

Unitron cannot be held liable for any damages resulting from the use of this product. Specifications are subject to change without notice. 01/21

© Unitron - Frankrijklaan 27 - B-8970 Poperinge - Belgium

T +32 57 33 33 63 F +32 57 33 45 24

sales@unitrongroup.com

www.unitrongroup.com



Kit con centralini TV autoprogrammabili serie **SMART AMP**

SMART AMP (REF. 7473L1 – 7473L2 – 7474L1 – 7474L2)

1. INTRODUCTION

1.1. Product description

- Scans all channels, amplifies the weak signals while keeping the strong channels
- All output channels have an equal and stable output power
- Treats even the most difficult situations with adjacent channels
- Channels with the same frequency can be amplified in and re-located to the LTE band (switchable)
- Fully automatic channel scan and process function upon double power start-up.
- Fully automatic recognition of the applied country channel plan
- SAW filters for LTE (4G or 5G) protection on all inputs
- Outdoor weatherproof mast-head housing
- DC Power over coax
- All ports ESD protected

1.2. Package contents


- 1 Smart Amp (ref. 7473L1 – 7473L2 – 7474L1 – 7474L2)
- 1 Power Supply 12V (ref. 2437)
- 1 wall clamp



Kit con centralini TV autoprogrammabili serie **SMART AMP**

SMART AMP (REF. 7473L1 – 7473L2 – 7474L1 – 7474L2)

1.3. Hardware installation

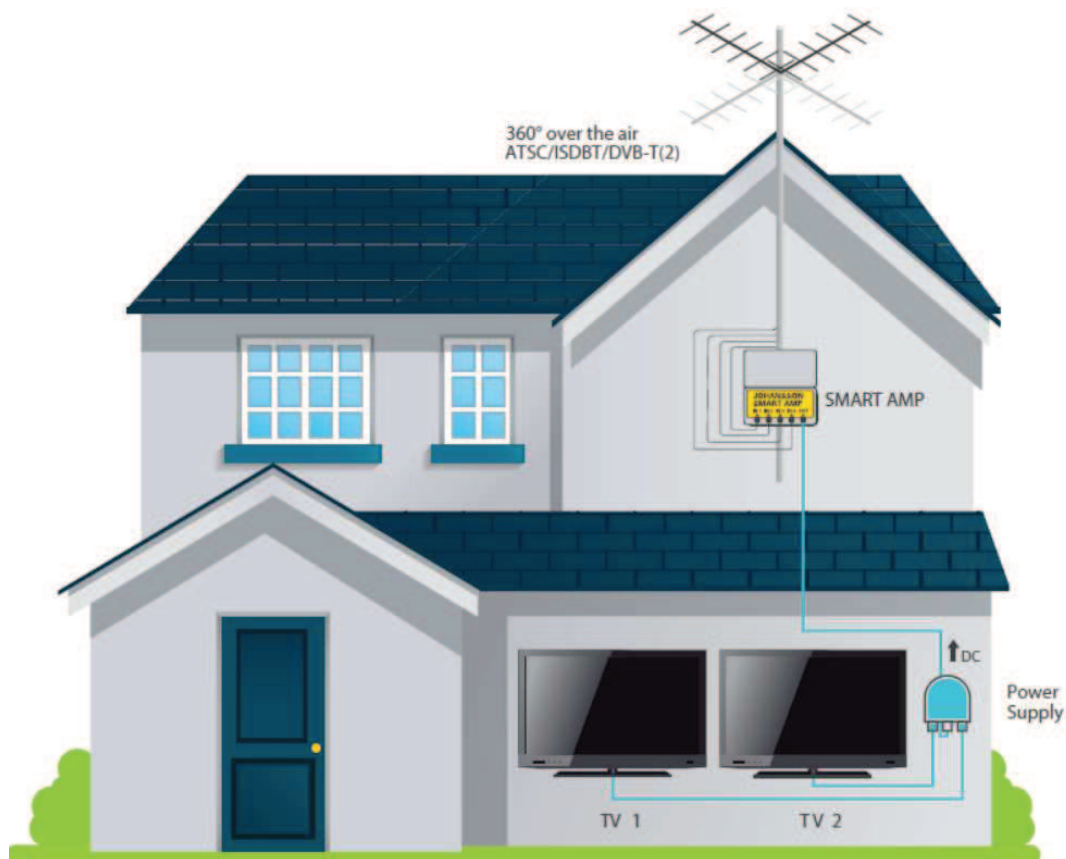

1.4. Installing the Smart Amp

- Connect your Terrestrial antennas to the Smart Amp
- Connect the Smart Amp output to the Power Supply
- Connect your TVs to the Power Supply
- To force a channel scan: unpower and repower Power Supply within 5 sec.

(Status LED on Smart Amp will blink when scanning)

Important: Mount the module vertically to a wall in a well-ventilated room and leave a minimum space of 15 cm around the product to guarantee a maximum ventilation of the product



Kit con centralini TV autoprogrammabili serie **SMART AMP**

SMART AMP (REF. 7473L1 – 7473L2 – 7474L1 – 7474L2)

2. TECHNICAL SPECIFICATIONS

		7473L1	7474L1	7473L2	7474L2
Inputs	-	3	4	3	4
Outputs	-	4G (> CH60)	4G (> CH60)	5G (> CH48)	5G (> CH48)
Frequency range	-	VHF BIII + UHF Automatic channel plan selection			
LTE band rejection	dB	>40			
Output	-	1			
Output Power	dBμV	85			
Frequency Range	MHz	174 - 862			
LTE band Re-use	-	L1 = CH61-69 (790MHz-862MHz) Switch ON-OFF		L2 = CH49-69 (694MHz-862MHz) Switch ON-OFF	
Adjacent channel isolation	dB	>35			
Input sensitivity	dBμV	Minimum 40			
Operating temperature	°C	-20 to +50			
Power Supply	-	External power supply (ref. 2437 - 2 out)			
Power	-	12V/300mA (DC over coax) (350mA - 4 in)			
Dimensions	mm	120 x 115 x 50			



Kit con centralini TV autoprogrammabili serie **SMART AMP**

SMART AMP (REF. 7473L1 – 7473L2 – 7474L1 – 7474L2)

3. SAFETY INSTRUCTIONS



Read these instructions carefully before connecting the unit



To prevent fire, short circuit or shock hazard:

- Do not expose the unit to rain or moisture.
- Install the unit in a dry location without infiltration or condensation of water.
- Do not expose it to dripping or splashing.
- Do not place objects filled with liquids, such as vases, on the apparatus.
- If any liquid should accidentally fall into the cabinet, disconnect the power plug.



To avoid any risk of overheating:

- Install the unit in a well aired location and keep a minimum distance of 15 cm around the apparatus for sufficient ventilation
- Do not place any items such as newspapers, tablecloths, curtains, on the unit that might cover the ventilation holes.
- Do not place any naked flame sources, such as lighted candles, on the apparatus
- Do not install the product in a dusty place
- Use the apparatus only in moderate climates (not in tropical climates)
- Respect the minimum and maximum temperature specifications



To avoid any risk of electrical shocks:

- Connect apparatus only to socket with protective earth connection.
- The mains plug shall remain readily operable
- Pull out power plug to make the different connections of cables
- To avoid electrical shock, do not open the housing of adapter.



Maintenance



Only use a dry soft cloth to clean the cabinet.



Do not use solvent



For repairing and servicing refer to qualified personnel.



Dispose according your local authority's recycling processes



Kit con centralini TV autoprogrammabili serie **SMART AMP**

SMART AMP (REF. 7473L1 – 7473L2 – 7474L1 – 7474L2)

4. CONDITIONS OF WARRANTY

Unitron N.V. warrants the product as being free from defects in material and workmanship for a period of 24 months starting from the date of production indicated on it. See note below.

If during this period of warranty the product proves defective, under normal use, due to defective materials or workmanship, Unitron N.V. at its sole option, will repair or replace the product. Return the product to your local dealer for reparation.

THE WARRANTY IS APPLIED ONLY FOR DEFECTS IN MATERIAL AND WORKMANSHIP AND DOES NOT COVER DAMAGE RESULTING FROM:

- Misuse or use of the product out of its specifications,
- Installation or use in a manner inconsistent with the technical or safety standards in force in the country where the product is used,
- Use of non-suitable accessories (power supply, adapters...),
- Installation in a defect system,
- External cause beyond the control of Unitron N.V. such as drop, accidents, lightning, water, fire, improper ventilation...

THE WARRANTY IS NOT APPLIED IF

- Production date or serial number on the product is illegible, altered, deleted or removed.
- The product has been opened or repaired by a non-authorized person.

NOTE

Date of production can be found in the product's serial number code. The format will either be "YEAR W WEEK" (e.g., 2017W32 = year 2017 week 32) or "YYWW" (e.g., 1732 = year 2017 week 32).



www.unitrongroup.com

UNITRON NV
Frankrijklaan 27
B-8970 Poperinge
Belgium

T +32 57 33 33 63
F +32 57 33 45 24

sales@unitrongroup.com

www.unitrongroup.com

