Data sheet





Indoor fibre optic splitters

Operation scheme

FO-N FC/PC series

art. 19-023N FO-CM3N FC/PC

Ideal for the distribution of optical signals

It allows to divide the signal so that all the outputs have the same attenuation from one another.

Realized in plastic case with patch cords 50 cm with male FC/PC connectors.








Characteristics

Patch cords with FC/PC connectors.

Three outputs with the same attenuation from one another

Code		19-023N
Item		FO-CM3N FC/PC
No. outputs		3
Wavelength	nm	1310/1150
Splitter Ratio	%	33,3/33,3/33,3
Tap loss	dB	5,40
Patch cord length	mm	500
Type of connectors		FC/PC
Ø connectors	mm	10
Type of fibre optic for wiring		single mode 9/125
Dimensions (LxWxH)	mm	120x80x10
Packaging dimensions (LxWxH)	mm	270x225x25
Packaging weight (LxWxH)	Kg	0,17

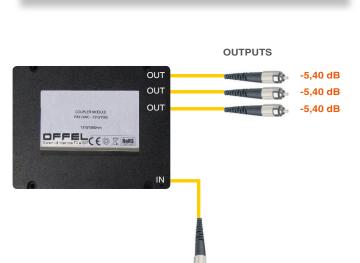

INPUT