

UHF antenna

KOLOR series

art. 21-286
K95Z

Ideal for the reception of DTT signals in the range E21÷E60 attenuating the LTE 800 MHz band without preventing the proper functioning of channel E60.

High-performance dipole, meticulously designed to maximize performance, with compact and functional design.

Fully gold anodized, with cradle 12x18 mm.
Molded elements quick assembly.

Equipped with auxiliary cradle.

Characteristics


- High gain and excellent value for Front-to-back Ratio
- Pre-assembled mast clamp
- Fully gold anodized
- Molded elements quick assembly
- Dipole with special attack for the insertion of the waterproof rubber cap

Code	21-286	
Item	K95Z	
Color	BLACK	
Channels	E21÷E60	
Elements	no.	95
Maximum gain	dBi	20
Front-to-back Ratio	dB	> 30
Beamwidth (-3 dB) H/V	°	26 / 32
Wind load @ 129 Km / h	N	150
VSWR		< 1,2
Impedance	Ω	75
Dimensions (LxWxH)	mm	2424x510x680
Cradle	mm	12x18
Reflector	grid	
Dipole connector	F-type	
Mast clamp for masts max	mm	Ø 60
Horizontal and vertical polarization with tilt adjustment	included	
Auxiliary cladle	included	

Packaging

Package	No. pieces	Dimensions LxWxH (mm)	Weight (Kg)
single pack	1	1420x90x185	3,6
multi-pack	6	1470x310x405	22,2

Gain

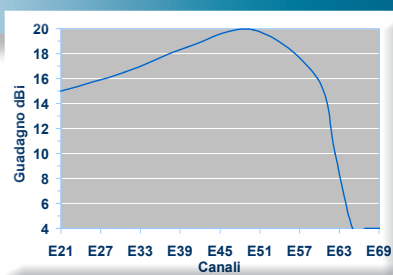

Directivity

The patterns shown represent measurements made in the horizontal plane at the center of the band.

