

UHF antenna

SUN HD series

art. 21-410 SUN 15P HD

Designed to maximize the reception of DTT signals in the range E21÷E40.
High-performance dipole, meticulously designed to maximize performance, with compact and functional design.

This antenna is distinguished by high efficiency and quick and easy assembly.

Characteristics

- High efficiency
- Quick and easy installation
- Silver anodized cradle
- Aluminium alloy 6101 rod elements
- Dipole with special attack for the insertion of the waterproof rubber cap

COLOR

DTT

Al

CONN. F

max
Ø60
mm


CE

Code	21-410	
Item	SUN 15P HD	
Color	WHITE RAL 7035	
Channels	E21÷E40	
Elements	no.	15
Maximum gain	dBi	16
Front-to-back Ratio	dB	> 25
Beamwidth (-3 dB) H/V	°	40 / 46
Wind load @ 129 Km / h	N	54
VSWR		< 1,2
Impedance	Ω	75
Dimensions (LxWxH)	mm	1305x400x490
Cradle	mm	12x18
Reflector	grid of galvanized wire Ø 2,7 mm with silver paint	
Dipole connector	F-type	
Mast clamp for masts max	mm	Ø 60
Horizontal and vertical polarization with tilt adjustment	included	

Packaging

Package	No. pieces	Dimensions LxWxH (mm)	Weight (Kg)
single pack	1	1600x50x34	1,6
multi-pack	15	1450x360x410	26

Gain

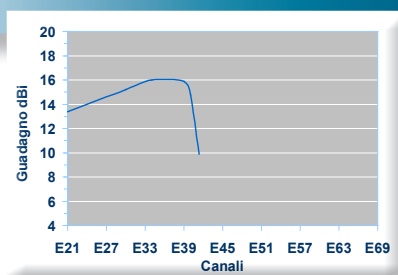

Directivity

The patterns shown represent measurements made in the horizontal plane at the center of the band.

