



Outdoor multiband amplifier 12÷15V broadband inputs Fusion Smart FCE series **art. 24-820 FCE40 V-U**



Outdoor multiband amplifier with broadband inputs, indicated medium/large size TV systems.

This amplifier is designed to optimize the amplification of DTT signals in the range E05÷E12+E21÷E48, attenuating the 700 MHz band without preventing the proper functioning of the channel E48.

Ideal in case of signal fluctuation thanks to the Automatic Gain Control on UHF band which allows to maintain constant the output level.

Selector for setting the maximum UHF band output level: 114 or 124 dBμV.

The two inputs are so distributed:

- 1 VHF band input;
- 1 UHF band input.

Each input is equipped with a trimmer for the gain adjustment (VHF: 0÷20 dB; UHF: 0÷15 dB) and a switch to enable remote power supply.

Fully shielded die-casting metal housing with screw F-type connectors and tilting mechanism for an easy cable connection. Sturdy waterproof case in ABS plastic with housing for the insertion of cables. Fixing accessory suitable for masts up to Ø 60 mm included.


Characteristics

- Automatic Gain Control (AGC) on UHF band
- Switch for setting the maximum output level in the UHF band 114 or 124 dBμV
- High output level
- Separate amplification for VHF and UHF bands
- Components with a high quality standard

Code	24-820
Item	FCE40 V-U
No. of inputs	2
No. of adjustments	2
VHF band noise figure	dB
UHF band noise figure	dB
VHF band max output level*	dBμV
UHF band max output level*	dBμV
VHF input max gain	dB ±2
UHF input max gain	dB ±2
AGC range	dB
Absorbed current	mA
Supply voltage	Vdc
Dimensions (LxWxH)	mm
Packaging dimensions (LxWxH)	mm
Packaging weight	Kg
Fit temperature	°C
Compliant to EU directives	2014/53/UE, 2011/65/UE

* Maximum output level measured with the method IM3 -35dBc 2 tones.
Technical data refer to a temperature of 25 °C

Example of application

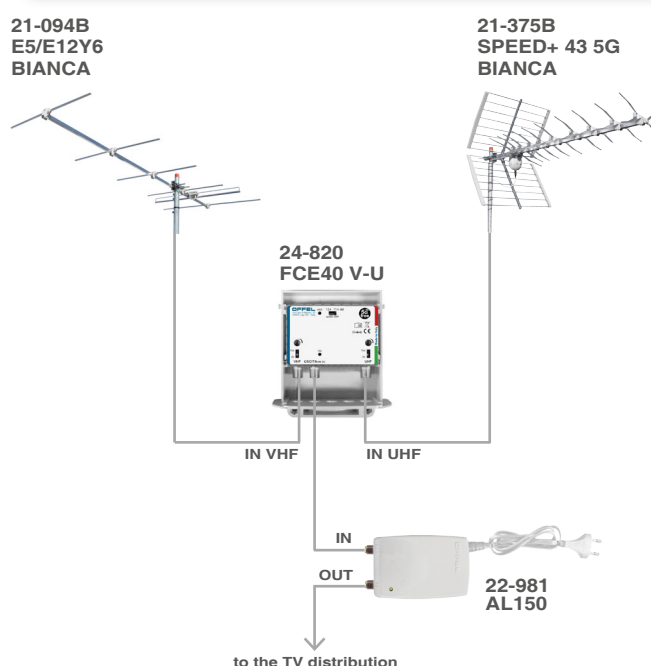

Rev. 1 09.2022

