



## Indoor splitter

FUSION series

**art. 27-205**  
**CM5**

Ideal for the distribution of the TV-SAT signals in the 5÷2150 MHz frequency range.

It allows to divide the signal so that all the outputs have the same attenuation from one another.

It is an indoor product, realized in die-casting housing with screw F-type connectors.

Provided with a directional passage of current on all the outputs.

Compatible with the signals for the return line.

### Characteristics


- Realized in die-casting housing with screw F-type connectors
- Five outputs with the same attenuation from one another
- Passage of current on all the outputs



Code	27-205	
Item	CM5	
No. outputs	5	
Frequencies range	MHz	5÷2150
Tap loss TV	dB ±1	13
Tap loss SAT	dB ±1	13
Tap loss Ch.R	dB ±1	13
Outputs isolation TV	dB ±1	>20
Outputs isolation SAT	dB ±1	>18
Outputs isolation Ch. R	dB ±1	>14
Return loss Ch. R	dB	>6
Connectors	screw F-type	
Dimensions (LxWxH)	mm	75x39x26
Fit temperature	°C	-10 ÷ +55
Compliant to	EN 55083-2, EN 50083-4, EN 60065, EN 60728-11	

Technical data refer to a temperature of 25 °C

### Operation scheme

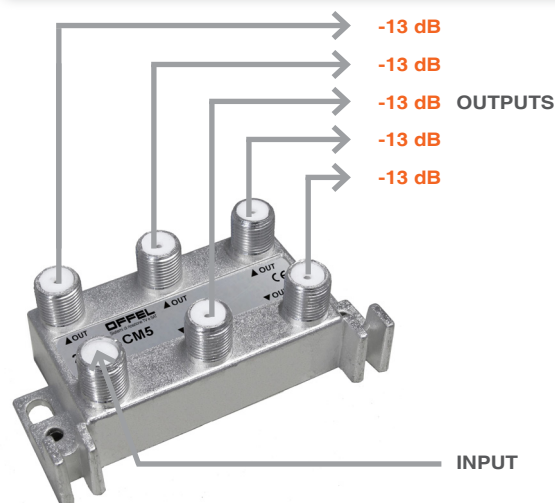

Packaging	
Package	multi-pack
Quantity	pcs 10
Packaging dimensions (LxWxH)	mm 185x150x50
Packaging weight	Kg 0,75

