



## Universal LNB

### 4 independent outputs

### art. 13-244

### LNB QUAD PREMIUM



Universal LNB that allows the reception of digital signals of a satellite. Equipped with 4 outputs.

It allows the connection of up to 4 independent STBs, one for each output.


#### Characteristics

- Low phase noise DVB-S2 (HDTV) compliant
- Low noise figure
- Low power consumption
- Very high cross polarization isolation

- Very high frequency stability
- High conversion gain
- Sliding protection for F connectors

| Code                                | 13-244                 |
|-------------------------------------|------------------------|
| Item                                | LNB QUAD PREMIUM       |
| No. of outputs                      | 4                      |
| Commutation output                  | 13÷18V 0÷22KHz         |
| Input frequency range               | MHz 10700 ~ 12750      |
| Output frequency range              | MHz 950 ~ 2150         |
| LO frequency                        | MHz 9750, 10600        |
| Noise figure                        | dB 0,2 typ. 0,7 max    |
| LO initial accuracy                 | MHz ± 1.0 max          |
| LO temperature drift                | MHz ± 3.0 max          |
| Phase noise (@10 KHz)               | dBc/Hz - 80 max        |
| Conversion gain                     | dB 55 min              |
| Gain ripple (over 27 MHz bandwidth) | dB ± 0,6               |
| Gain variation (over full band)     | dB ± 3 max             |
| Image rejection                     | dB 40 min              |
| Cross polarization isolation        | dB 22 min              |
| Output VSWR                         |                        |
| Radiated interference               | dBm - 50               |
| In-band spurious                    | dBm - 60 max           |
| Channel bandwidth                   | MHz 60                 |
| Channel isolation                   | dB 20 min              |
| Legacy switch voltage control       | V H: 10÷14<br>V: 16÷20 |
| Tone 22 K                           | KHz 22 ± 4             |
| Current consumption @ 11-20 V       | mA 120                 |
| Output impedance                    | Ω 75                   |
| Outputs connectors                  | screw F-type           |
| Feed diameter                       | mm 40                  |
| Dimensions (LxWxH)                  | mm 145x89x70           |
| Packaging dimensions (LxWxH)        | mm 155x91x76           |
| Packaging weight                    | Kg 0,183               |
| Fit temperature                     | °C - 35 ÷ + 60         |
| Compliant to                        | EN 55013, EN 55020     |

#### Example of application

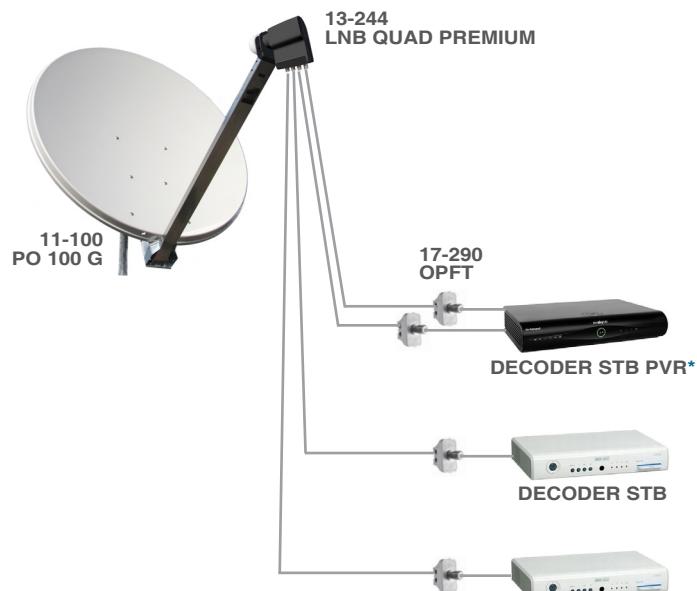

\* e.g. MySKYHD

