Data sheet







Channel pass filter

FSP/X series

art. 22-278 FSP/X 1Can.3

This indoor passive filter allows the passage of a single band 3 channel, while attenuates all the other

Realized with adjustments on desired channel. Specify the channel when ordering.
















Characteristics

band 3 channels.

• Shielded housing with screw F-type connectors

Code		22-278
Item		FSP/X 1Can.3
No. of inputs		1
No. of outputs		1
TV frequencies	MHz	170÷230
No. of band 3 filtered channels		1
Bandwidth	MHz	7
No. of adjustments		3
Insertion loss of band 3 filtered channel	dB	2,5
Insertion loss of band 3 other channels (except adjacent one)	dB	> 30
Dimensions (LxWxH)	mm	90x20x52
Packaging dimensions (LxWxH)	mm	95x55x34
Packaging weight	Kg	0,12
Fit temperature	°C	-10 ÷ +55
Compliant to		EN 55083-2, EN 60065

Technical data refer to a temperature of 25 °C

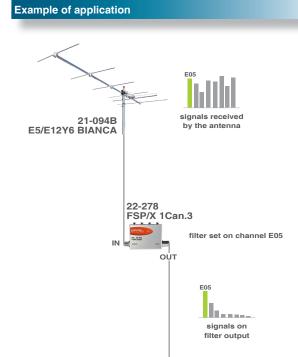

to the multiband amplifier band 3 or VHF input