



Logarithmic antenna

LF series

art. 21-347
LF 34

Ideal for the reception of DTT signals.

Completely pre-assembled.

Back connection F-type to make easier the cable fixing.

Realized with rod elements (Ø 4 mm) and anticorodal double cradle (14x14 mm).

Characteristics

- Completely pre-assembled
- Rod elements Ø 4 mm
- Anticorodal double cradle
- Pre-assembled mast clamp
- Back connection F-type

COLOR

DTT

EASY

Al

CONN. F

max
Ø60
mm


CE

Code	21-347	
Item	LF 34	
Color	WHITE RAL 7035	
Channels	E05+E12 + E21+E40	
Elements	no.	5 7
Maximum gain	dBi	9,2 10,4
Front-to-back Ratio	dB	> 20 > 25
Beamwidth (-3 dB) H/V	°	60 / 66 52 / 56
Wind load @ 129 Km / h	N	32
VSWR		< 1,5
Impedance	Ω	75
Dimensions (LxW)	mm	910x884
Double cradle	mm	14x14
Dipole connector		F-type
Mast clamp for masts max	mm	Ø 60
Horizontal and vertical polarization with tilt adjustment		included


Packaging

Quantity (pcs)	Dimensions LxWxH (mm)	Unit weight (Kg)	Total weight (Kg)
15	975x835x435	1	17

Gain

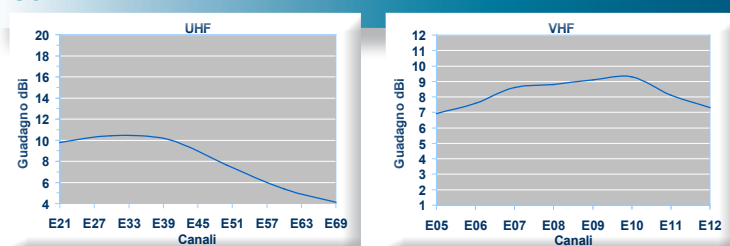

Directivity

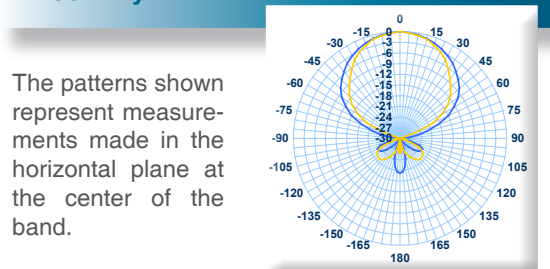

Rev. 1 09.2016

