



## Outdoor multiband amplifier 12÷15V broadband inputs Fusion Pro FPE series **art. 24-760 FPE20/30 V-U**



Outdoor multiband amplifier with broadband inputs, indicated medium size TV systems.

This amplifier is designed to optimize the amplification of DTT signals in the range E05÷E12+E21÷E48, attenuating the 700 MHz band without preventing the proper functioning of the channel E48.

Ideal for different system solutions thanks to a two-step selector that allows to set the maximum gain on the UHF band at 20 or 30 dB.

The VHF band, instead, has a maximum gain of 30 dB.

The two inputs are so distributed:

- 1 VHF band input;
- 1 UHF band input.

Each input is equipped with a trimmer for the gain adjustment (VHF: 0÷20 dB; UHF: 0÷15 dB) and a switch to enable remote power supply.

Fully shielded die-casting metal housing with screw F-type connectors and tilting mechanism for an easy cable connection. Sturdy waterproof case in ABS plastic with housing for the insertion of cables.


Fixing accessory suitable for masts up to ø 60 mm included.

### Characteristics

- 20 or 30 dB UHF band max gain selector
- High output level
- Separate amplification for VHF and UHF bands
- Components with a high quality standard

Code	24-760	
Item	FPE20/30 V-U	
No. of inputs	2	
No. of adjustments	2	
VHF band noise figure	dB	5
UHF band noise figure	dB	5
VHF band max output level*	dB $\mu$ V	120
UHF band max output level*	dB $\mu$ V	125
<b>UHF BAND GAIN SELECTOR</b>	<b>20 dB</b>	<b>30 dB</b>
VHF input max gain	dB ±2	30
UHF input max gain	dB ±2	23      33
Absorbed current	mA	200
Supply voltage	Vdc	12÷15
Dimensions (LxWxH)	mm	132x55x107
Packaging dimensions (LxWxH)	mm	115x55x135
Packaging weight	Kg	0,345
Fit temperature	°C	0 ÷ +55
Compliant to EU directives	2014/53/UE, 2011/65/UE	

### Example of application

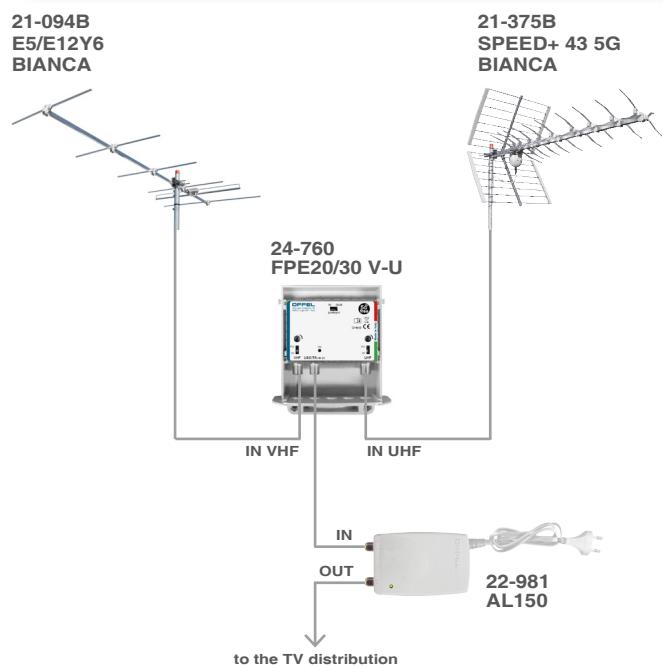

\* Maximum output level measured with the method IM3 -35dBc 2 tones.

Technical data refer to a temperature of 25 °C

